# Standard Features & Accessories

### All models include

- Adjustable duct cover (for 8 – 9' ceilings) is standard
- Must also purchase interior, exterior or in-line ventilator kit, sold separately (see **Installation Notes & Accessories** for recommended Viking ventilator products)
- Heat sensor turns the ventilator on full power when cooking temperatures reach uncomfortable levels
- Variable speed controls for custom venting—separate on/off switch allows you to leave ventilator at favorite/most-used setting
- 12-hour timer built into ventilator controls
- Delay feature allows you to set the ventilator to shut off on its own from 10 to 30 minutes later
- 24"D. (tests show 24"D. hoods perform properly over 27"D. ranges)
- Heavy-duty construction; sleek, contemporary design and styling
  - o Virtually seamless stainless steel design with no visible screws
- Easy cleanup
  - o Dishwasher-safe, stainless steel mesh filters efficiently remove grease and heated vapors from the air, and are easily removed for quick cleaning (frame and mesh are stainless steel)
    - See **Dimensions & Specifications** table for number of filters per model
  - o Design of low-profile filter system means less interior hood space to be cleaned
  - o Canopy interior is completely lined in stainless steel for increased rigidity, seamless appearance, and easy cleaning
- 50-watt halogen lights with dimmer control
- Power switch and dimmer control are separate, allowing you to leave dimmer at favorite position
  - o See **Dimensions & Specifications** table for number of lights per model

### Model numbers

**CLASSIC CHIMNEY WALL HOODS**

- DCWH3042—30"W./12"H.
- DCWH3644—36"W./14"H.
- DCWH4244—42"W./14"H.
- DCWH4844—48"W./14"H.

**CLASSIC CHIMNEY WALL HOODS WITH LEDGE**

- DCWL3342—33"W./12"H.
- DCWL3944—39"W./14"H.
- DCWL4544—45"W./14"H.
- DCWL5144—51"W./14"H.

**CLASSIC CHIMNEY WALL HOODS, LEDGELESS**

- DCWN3042—30"W./12"H.
- DCWN3644—36"W./14"H.
- DCWN4244—42"W./14"H.
  DCWN4844—48"W./14"H.

# Model Options

**DCWH Designer Chimney Wall Hood***

**DCWL Designer Chimney Wall Hood w/Ledge***

**DCWN Designer Chimney Ledgeless Wall Hood***

**FINISH DETAILS**

- Stainless Steel (SS), Black (BK), White (WH), Metallic Silver (MS), Graphite Gray (GG), Stone Gray (SG), Taupe (TP), Biscuit (BT), Cotton White (CW), Oyster Gray (OG), Golden Mist (GM), Lemonade (LE), Sage (SA), Mint Julep (MJ), Sea Glass (SE), Iridescent Blue (IB), Viking Blue (VB), Pumpkin (PM), Racing Red (RR), Apple Red (AR), Burgundy (BU), Plum (PL), Chocolate (CH), and Cobalt Blue (CB).
- Accessory Rail Option*—Front of hood. (Must be ordered factory installed. Rail not available on ledge & ledgeless models.)
  - o Stainless Steel/Chrome (CR)—Stainless steel rail with chrome supports/brackets and hooks (included).
  - o Brass Rail Option (BR)—nameplate, rail, supports/brackets, and hooks (included). Brass components have a durable protective coating for maintenance-free normal use.

***Shown throughout with adjustable duct cover, included.**

**ORDERING INSTRUCTIONS**

First specify model number, followed by color code (DCWH3042**SS**). If ordering optional decorative rail, specify code at end (DCWH3042SS**CR**).


©2011 VRC—INFORMATION SUBJECT TO CHANGE

✪ Please see **Installation Notes & Accessories** for important information, including ventilator kits, duct covers, backsplashes, and warming shelf panels.

# Dimensions & Specifications

## PRODUCT DIMENSIONS

DCWH Designer
Chimney Wall Hood

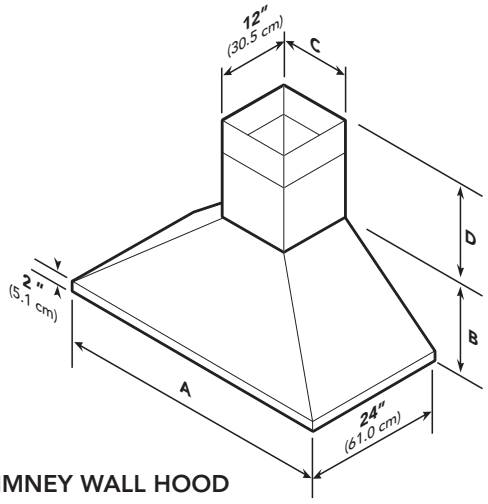


CHIMNEY WALL HOOD

| Model | Hood | | Duct Cover | | | Lights | Filters | Heat Lamps | Approx. Ship. wt. |
|---|---|---|---|---|---|---|---|---|---|
| | Width (A) | Height (B) | Width (C) | Depth | Height (D) | | | | |
| DCWH3042 | 29-7/8" (75.9 cm) | 12" (30.5 cm) | 10" (25.4 cm) | 12" (30.5 cm) | 18" (45.7 cm)—30" (76.2 cm) | 2 | 2 | N/A | 51 lbs. (23.1 kg) |
| DCWH3644 | 35-7/8" (91.1 cm) | 14" (35.6 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 2 | 2 | N/A | 61 lbs. (27.7 kg) |
| DCWH4244 | 41-7/8" (106.4 cm) | 14" (35.6 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 2 | 3 | N/A | 71 lbs. (32.2 kg) |
| DCWH4844 | 47-7/8" (121.6 cm) | 14" (35.6 cm) | 18" (45.7 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 3 | 3 | N/A | 82 lbs. (37.2 kg) |



REVISED 5/2/11
©2011 VRC—INFORMATION SUBJECT TO CHANGE

✪ Please see **Installation Notes & Accessories** for important information, including ventilator kits, duct covers, backsplashes, and warming shelf panels.

# Dimensions & Specifications

## PRODUCT DIMENSIONS

DCWL Designer Chimney Wall Hood w/Ledge

DCWN Designer Chimney Ledgeless Wall Hood

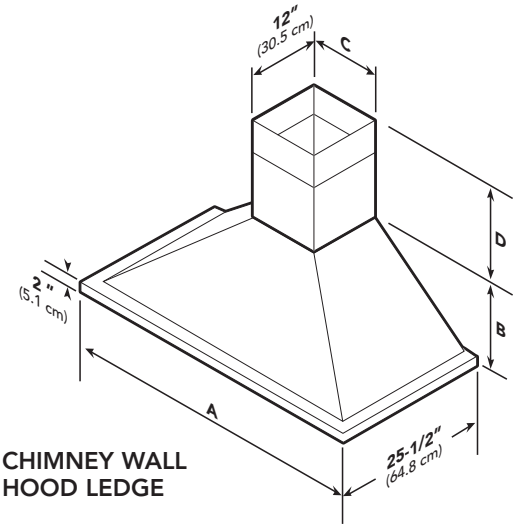


CHIMNEY WALL HOOD LEDGE

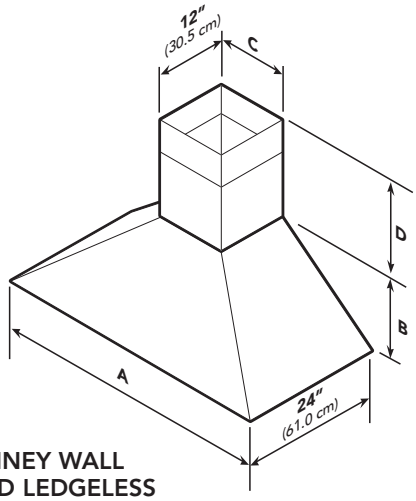


CHIMNEY WALL HOOD LEDGELESS

| Model | Hood | | Duct Cover | | | Lights | Filters | Heat Lamps | Approx. Ship. wt. |
|---|---|---|---|---|---|---|---|---|---|
| | Width (A) | Height (B) | Width (C) | Depth | Height (D) | | | | |
| DCWL3342 | 32-7/8" (83.5 cm) | 12" (30.5 cm) | 10" (25.4 cm) | 12" (30.5 cm) | 18" (45.7 cm)—30" (76.2 cm) | 2 | 2 | N/A | 54 lbs. (24.5 kg) |
| DCWL3944 | 38-7/8" (98.4 cm) | 14" (35.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 2 | 2 | N/A | 64 lbs. (29.0 kg) |
| DCWL4544 | 44-7/8" (114.0 cm) | 14" (35.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 2 | 3 | N/A | 74 lbs. (33.6 kg) |
| DCWL5144 | 50-7/8" (129.2 cm) | 14" (35.5 cm) | 18" (45.7 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 3 | 3 | N/A | 85 lbs. (38.6 kg) |
| DCWN3042 | 29-7/8" (75.9 cm) | 12" (30.5 cm) | 10" (25.4 cm) | 12" (30.5 cm) | 18" (45.7 cm)—30" (76.2 cm) | 2 | 2 | N/A | 51 lbs. (23.1 kg) |
| DCWN3644 | 35-7/8" (91.1 cm) | 14" (35.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 2 | 2 | N/A | 61 lbs. (27.7 kg) |
| DCWN4244 | 41-7/8" (106.4 cm) | 14" (35.5 cm) | 12" (30.5 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 2 | 3 | N/A | 71 lbs. (32.2 kg) |
| DCWN4844 | 47-7/8" (121.6 cm) | 14" (35.5 cm) | 18" (45.7 cm) | 12" (30.5 cm) | 16" (40.6 cm)—28" (71.1 cm) | 3 | 3 | N/A | 82 lbs. (37.2 kg) |



REVISED 5/2/11
©2011 VRC—INFORMATION SUBJECT TO CHANGE

## Dimensions & Specifications

CLEARANCE DIMENSIONS

CHIMNEY WALL HOOD

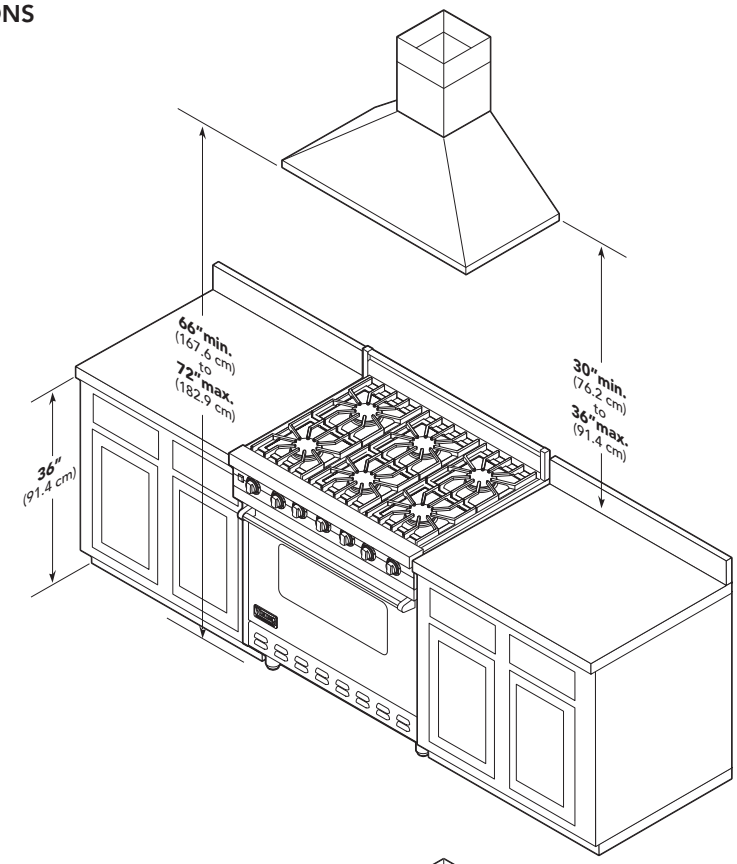


CHIMNEY WALL HOOD
LEDGE/LEDGELESS

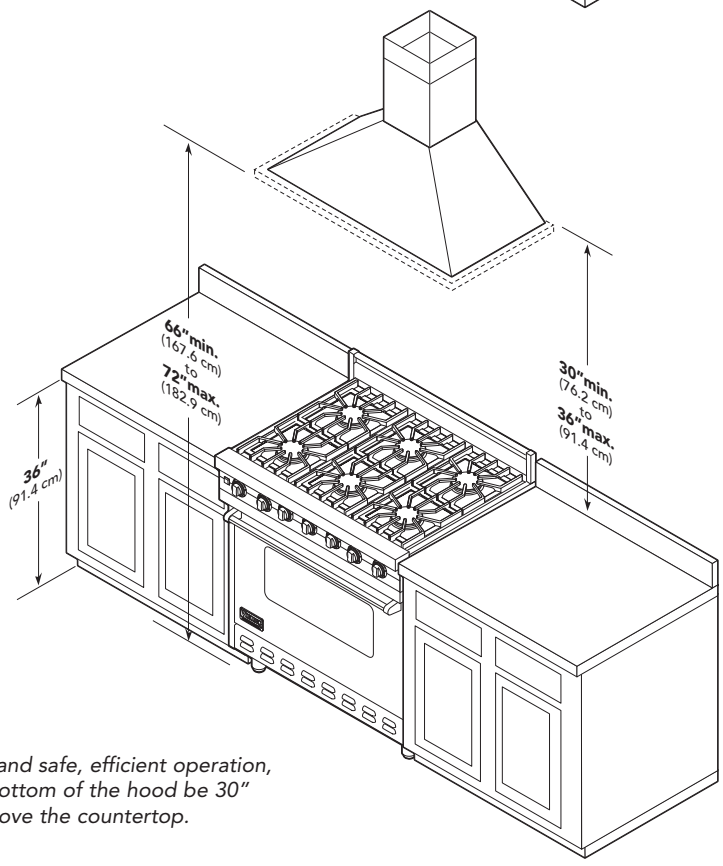


***Note:*** *For best performance and safe, efficient operation, it is recommended that the bottom of the hood be 30" (76.2 cm) to 33" (83.8 cm) above the countertop.*



REVISED 5/2/11
©2011 VRC—INFORMATION SUBJECT TO CHANGE

# Installation Requirements

DCWH Designer
Chimney Wall Hood

DCWL Designer
Chimney Wall Hood
w/Ledge

DCWN Designer
Chimney Ledgeless
Wall Hood

## UTILITY REQUIREMENTS

**Proper installation/ducting is extremely important to ensure maximum performance. Use a qualified and trained installer.**

### VENTILATION

- Check with a qualified and trained installer or local codes for makeup air requirements, if any.
- Max. duct run
  - o For 300 – 1,200 CFM—50' (15.2 m)
  - o For 1,500 CFM—75' (22.9 m)
  - o Duct run length is for general reference only; always use a qualified and trained installer.
  - o Straight runs and gradual turns are best; for example, each 90" elbow is equivalent to 5' – 10' (1.52 – 3.05 cm) of straight run.
- 7' round duct for 300 – 600 CFM; 10' for 900 – 1500 CFM
  - o Never use flexible duct; it creates back pressure/air turbulence and greatly reduces performance.

### GAS

Not applicable

### ELECTRICAL

- Hardwire direct with two-wire with ground
- 120 VAC/60 Hz
- Max. amp usage (rating includes rec. ventilator kit rating)

### PLUMBING

Not applicable

***Note:*** *All CFMs are based on tests with 0.1 static pressure. Without applying static pressure (some brands do not), CFM could be greatly overstated.*

| Model | Ventilator kits | | Duct size | | Max. amps | |
|---|---|---|---|---|---|---|
| | Interior | Exterior | Interior | Exterior | Interior | Exterior |
| DCWH3042 | DIV300/DIV440 | DEV900/DEV1200 DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 1.7/3.2 | 6.6/3.9 |
| DCWH3644 | DIV300/DIV600* | DEV900/DEV1200* DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 1.7/3.9 | 6.6/3.9 |
| DCWH4244 | DIV600 | DEV900/DEV1200* DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 3.9 | 6.6/3.9 |
| DCWH4844 | DIV1200* | DEV1200/DEV1500** DIL1200 | 10" (25.4 cm) | 10" (25.4 cm) | 7.3 | 4.3/5.1 |
| DCWL3342 | DIV300/DIV440 | DEV900/DEV1200 DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 1.7/3.2 | 6.6/3.9 |
| DCWL3944 | DIV300/DIV600* | DEV900/DEV1200* DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 1.7/3.9 | 6.6/3.9 |
| DCWL4544 | DIV600 | DEV900/DEV1200* DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 3.9 | 6.6/3.9 |
| DCWL5144 | DIV1200 | DEV1200/DEV1500** DIL1200 | 10" (25.4 cm) | 10" (25.4 cm) | 7.3 | 4.3/5.1 |
| DCWN3042 | DIV300/DIV440 | DEV900/DEV1200 DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 1.7/3.2 | 6.6/3.9 |
| DCWN3644 | DIV300/DIV600* | DEV900/DEV1200* DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 1.7/3.9 | 6.6/3.9 |
| DCWN4244 | DIV600 | DEV900/DEV1200* DIL900/1200 | 7" (17.8 cm) | 10" (25.4 cm) | 3.9 | 6.6/3.9 |
| DCWN4844 | DIV1200* | DEV1200/DEV1500** DIL1200 | 10" (25.4 cm) | 10" (25.4 cm) | 7.3 | 4.3/5.1 |

* A 1,200 CFM interior- or exterior-power ventilator should be used when installed over range/rangetop with gas char-grill.
** It is recommended that the 1,500 CFM ventilator be used with longer duct runs.
***Note:*** *Maximum amp rating for hoods includes recommended ventilator kit rating. All products must be hard wired with two-wire ground. An interior- or exterior-power ventilator kit must be purchased for installation with all 18"H. hoods.*



REVISED 5/2/11
©2011 VRC—INFORMATION SUBJECT TO CHANGE

# ✪ Installation Notes & Accessories

### Recommended Ventilator Kits

- See **Installation Requirements** table for recommendations for each hood model
- One ventilator, one duct run for any size hood/ventilator
- A 1,200 CFM interior or 1,500 CFM exterior (if applicable) ventilator should be used over ranges/rangetops with gas grill
- Must use Viking ventilator kits with Viking hoods; use of non-Viking kits voids product warranty

| Kit model | Description | Hood models | Approx. ship wt. lbs. (kg) |
|---|---|---|---|
| DIV300 | 300 CFM interior-power | DCWH3042/3644, DCWL3342/3944, & DCWN3042/3644 | 15 (6.8) |
| DIV440 | 440 CFM interior-power | DCWH3042, DCWL3342, & DCWN3042 | 25 (11.3) |
| DIV600 | 600 CFM interior-power | DCWH3644/4244, DCWL3944/4544, & DCWN3644/4244 | 27 (12.2) |
| DIV1200 | 1,200 CFM interior-power | DCWH4844, DCWN5144, & DCWN4844 | 43 (19.4) |
| DEV900 | 900 CFM exterior-power | DCWH3042/3642/4244, DCWL3342/3944/4544, & DCWN3042/3644/4244 | 39 (17.6) |
| DEV1200 | 1,200 CFM exterior-power | DCWH3042/3644/4244/4844, DCWL3342/3944/4544/5144, & DCWN3042/3644/4244/4844 | 53 (23.9) |
| DEV1500 | 1,500 CFM exterior-power | DCWH4844, DCWL5144, & DCWN4844 | 47 (21.3) |
| DIL900 | 900 CFM in-line power | DCWH3042/3642/4244, DCWL3342/3944/4544, & DCWN3042/3644/4244 | 20 (9.1) |
| DIL1200 | 1,200 CFM in-line power | DCWH3042/3644/4244/4844, DCWL3342/3944/4544/5144, & DCWN3042/3644/4244/4844 | 25 (11.3) |

### Duct Cover Extensions

- For use with DCWH, DCWL, & DCWN hoods
- Extends height of hood by up to 12" (for 10' ceilings)
- Replaces adjustable duct cover supplied with hood
- Specify finish code following accessory model number (for example, DCCE1010-**SS**)
- Available in Stainless Steel (SS), Black (BK), White (WH), Metallic Silver (MS), Graphite Gray (GG), Stone Gray (SG), Taupe (TP), Biscuit (BT), Cotton White (CW), Oyster Gray (OG), Golden Mist (GM), Lemonade (LE), Sage (SA), Mint Julep (MJ), Sea Glass (SE), Iridescent Blue (IB), Viking Blue (VB), Pumpkin (PM), Racing Red (RR), Apple Red (AR), Burgundy (BU), Plum (PL), Chocolate (CH), and Cobalt Blue (CB).

| Model | Description | Approx. ship wt. lbs. (kg) |
|---|---|---|
| DCCE1010 | Duct cover extension (for 30" & 33"W. hoods—10"W. x 12"D. x 30" – 42"H.) | 4 (1.8) |
| DCCE1210 | Duct cover extension (for 30", 39", 42", & 45"W. hoods—12"W. x 12"D. x 28" – 40"H.) | 6 (2.7) |
| DCCE1810 | Duct cover extension (for 48" & 51"W. hoods—18"W. x 12"D. x 28" – 40"H.) | 8 (3.6) |

### Backsplashes

- Stainless Steel (SS)
- 30"H.
- Backsplashes protect the wall space below hood
- Create a continuous finish between cooking surface and hood
- Low maintenance, easy to clean
- Hemmed edges with screw holes
- Kit includes backsplash and fastening screws

| Model | Description | Approx. ship wt. lbs. (kg) |
|---|---|---|
| BKS30 | 30"W. backsplash | 7 (3.2) |
| BKS36 | 36"W. backsplash | 9 (4.1 |
| BKS42 | 42"W. backsplash | 12 (5.4) |
| BKS48 | 48"W. backsplash | 14 (6.3) |
| BKS54 | 54"W. backsplash | 17 (7.7) |



REVISED 5/2/11
©2011 VRC—INFORMATION SUBJECT TO CHANGE

## ✪ Installation Notes & Accessories

### Warming Shelf Panels

- Stainless Steel (SS)
- 12"D./12"H.
- Shelf panels hold cookware and condiments
- Fold up/down, heavy-duty warming shelves (non-removable), factory installed on stainless steel backsplash
- 15-7/8"W. X 10-1/8"D.
- Kit includes shelf (or shelves) and fastening screws

| Model | Description | Approx. ship wt. lbs. (kg) |
|---|---|---|
| WGP30 | 30"W. warming shelf panels (one shelf) | 9 (4.1) |
| WGP36 | 36"W. warming shelf panels (two shelves) | 12 (5.4) |
| WGP42 | 42"W. warming shelf panels (two shelves) | 14 (6.3) |
| WGP48 | 48"W. warming shelf panels (two shelves) | 16 (7.2) |
| WGP54 | 54"W. warming shelf panels (two shelves) | 20 (9.0) |

### Compliance Information

## WARRANTY SUMMARY*

- Three-year full warranty—complete product (Professional and Designer)
- Five-year limited warranty—all ventilator motors (Professional and Designer)
- Ninety-day limited warranty—cosmetic parts such as glass, painted, and decorative items (Professional and Designer)

***Must use Viking ventilator kits with Viking hoods; use of non-Viking kits voids product warranty**. For complete warranty see *Use & Care Guide*.
Warranty valid on Viking products shipped within the United States and Canada.



REVISED 5/2/11
©2011 VRC—INFORMATION SUBJECT TO CHANGE